



## OIL CATCH TANK INSTALLATION KIT

Part No: ST1209

V20250414

### Fitting Instructions

**WARNING:** If you do not have basic mechanical skills then **DO NOT** attempt to fit this kit. Incorrect fitting could result in serious damage to your engine and will not be covered under warranty!

**! CAUTION !** : Some metal parts in this kit may have sharp edges. Please take care when handling.

### Compatible Oil Catch Tanks:

| Brand: | Part No: | Description:                          |
|--------|----------|---------------------------------------|
| SAAS   | ST1014   | Oil Catch Tank 4x4 Baffled (Black)    |
| SAAS   | ST1015   | Oil Catch Tank 4x4 Baffled (Polished) |

### Vehicle Details:

| Make:  | Model/Series:         | Year:          | Engine/Code:   |
|--------|-----------------------|----------------|----------------|
| Toyota | 70 Series Landcruiser | 2023 - current | 2.8L / 1GD-FTV |
|        |                       |                |                |

### Parts List:

| Part:                | Qty:      | Notes:                             |
|----------------------|-----------|------------------------------------|
| Tank bracket         | 1         | Fit to right side next to ABS pump |
| 16mm hose            | 1 x 600mm | Can be cut shorter if required     |
| 16mm hose            | 1 x 600mm | Can be cut shorter if required     |
| 16mm hose clamps     | 4         |                                    |
| M8 bolts / washers   | 2         |                                    |
| Cable ties           | 5         | Use to retain drain valve and hose |
| Fitting instructions | 5 pages   |                                    |
|                      |           |                                    |
|                      |           |                                    |

For further assistance email: [tech@saasautomotive.com.au](mailto:tech@saasautomotive.com.au)

# www.shopsaas.com

## Fitting Steps:

**Step 1:** Engine must be **OFF** and cool to touch.

**Step 2:** Fit tank bracket in location shown below.

Use the supplied M8 bolts and washers to mount tank bracket in this location



**Step 3:** Fit tank to bracket. If you wish to use the supplied drain valve, attach the drain valve before mounting the tank to the bracket.






## Fitting Steps:

**Step 4:** Remove the factory breather hose (shown below).

Factory breather hose

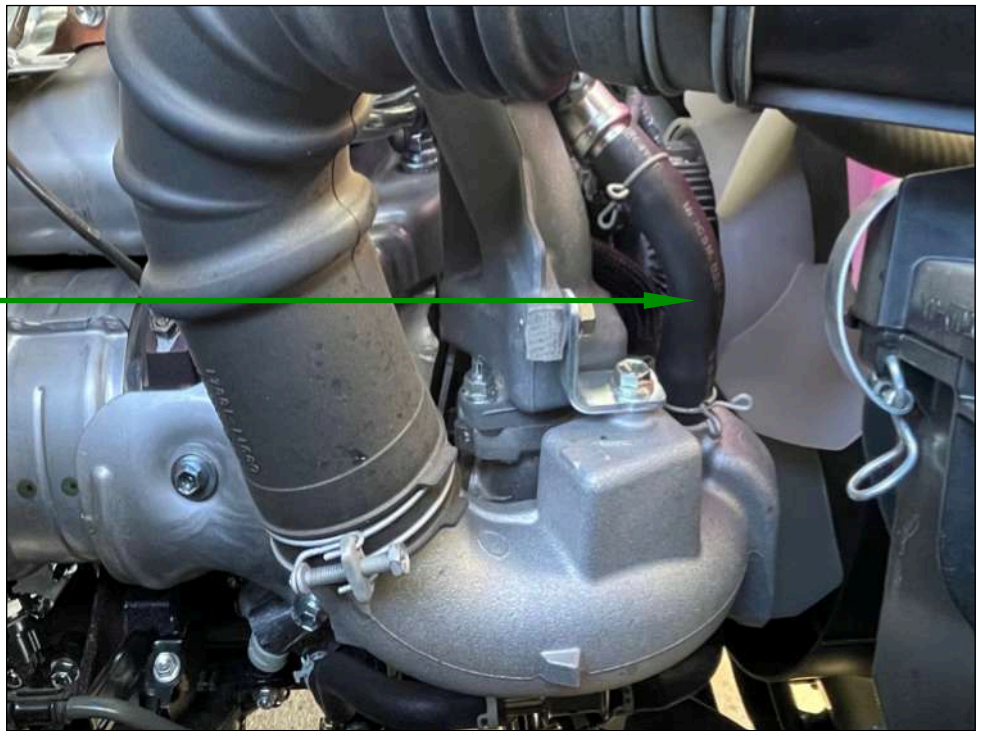


**Step 5:** Connect **(IN)** hose from engine to tank. See page 5 for layout.

**Step 6:** Connect **(OUT)** hose from intake to tank. See page 5 for layout.

**(IN)** Hose location:  
engine to tank

**(OUT)** Hose location:  
air intake to tank

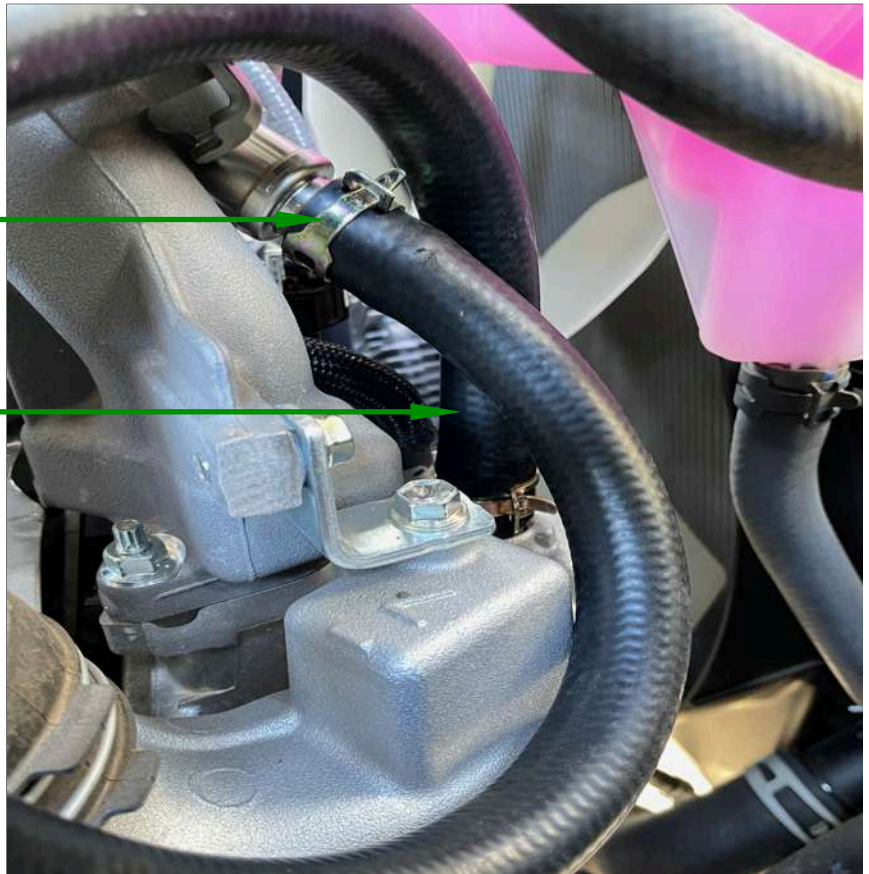




## Fitting Steps:

**Step 7:** Cable tie the drain valve in a easy to get to location. (Optional)

**Step 8:** Double-check all work **before** starting engine.

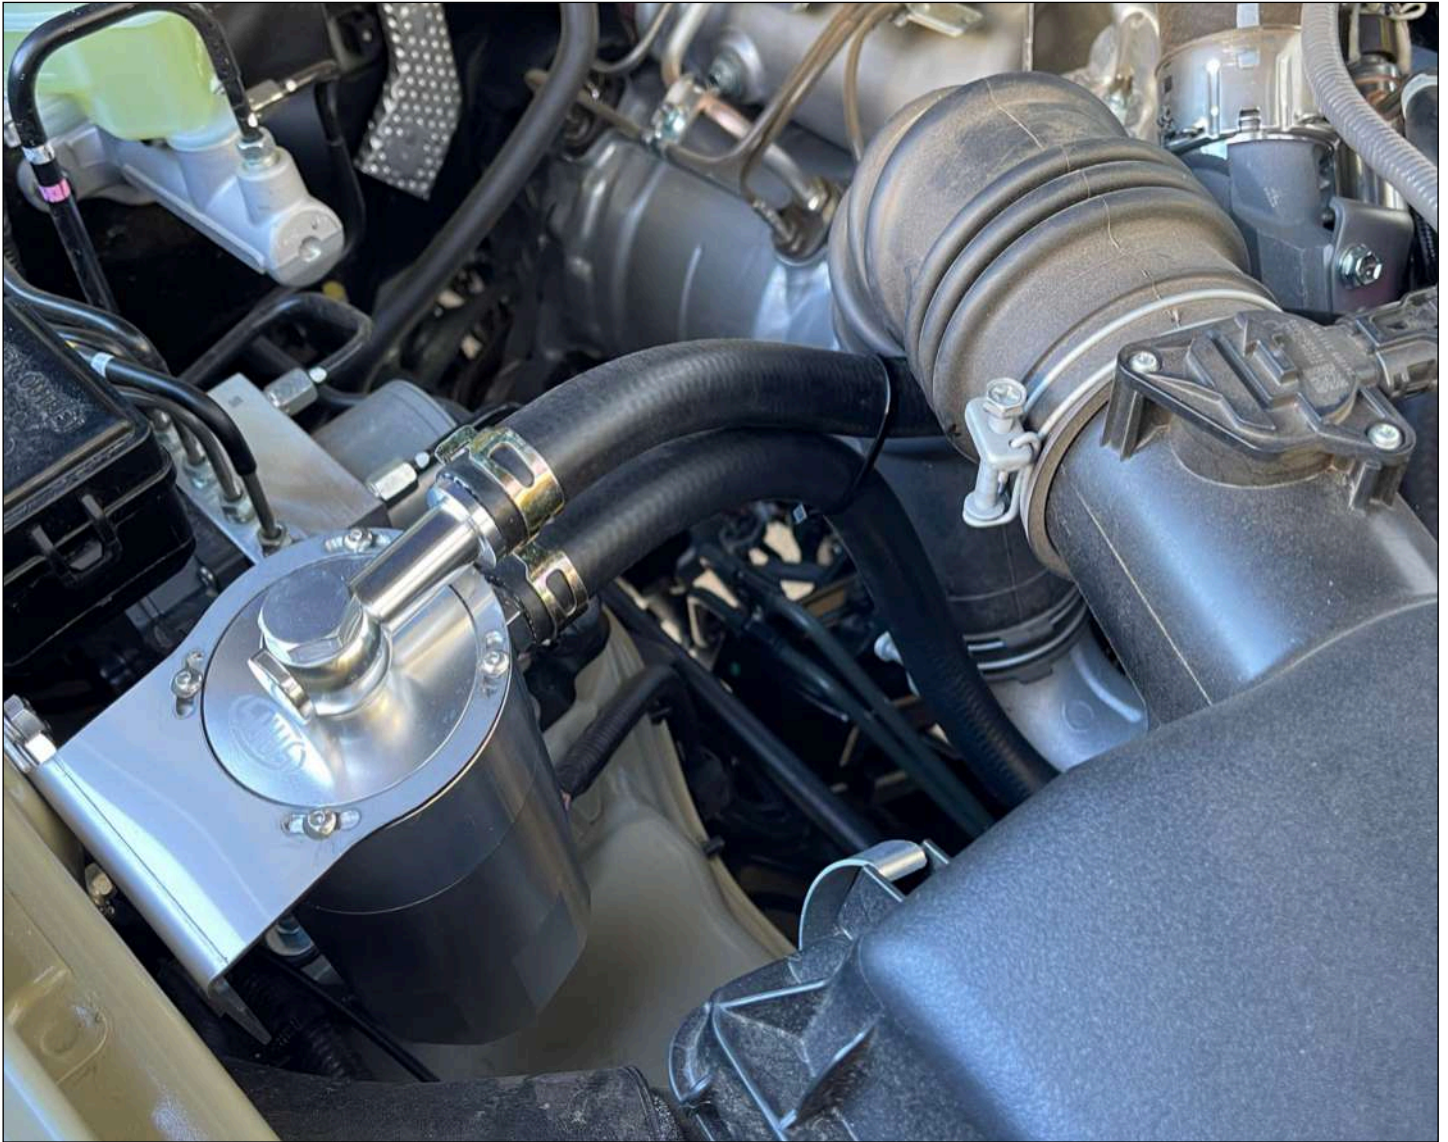


**NOTE:** SAAS recommends checking your catch tank after traveling 1000km, to see how much oil has accumulated in the tank. It is important that the build-up of oil does not rise above the internal baffle, through to the bronze filter.

## Tank Maintenance:

SAAS recommends cleaning out your tank and **filter** every service interval for optimal performance. Performance engines or vehicles operating in harsh conditions may require more frequent cleaning of the tank and filter.

**Cleaning steps:** Remove tank from vehicle. Remove tank base. Remove filter (optional). Clean all parts with a good quality automotive cleaner/degreaser. Reinstall.

## Typical Layout:

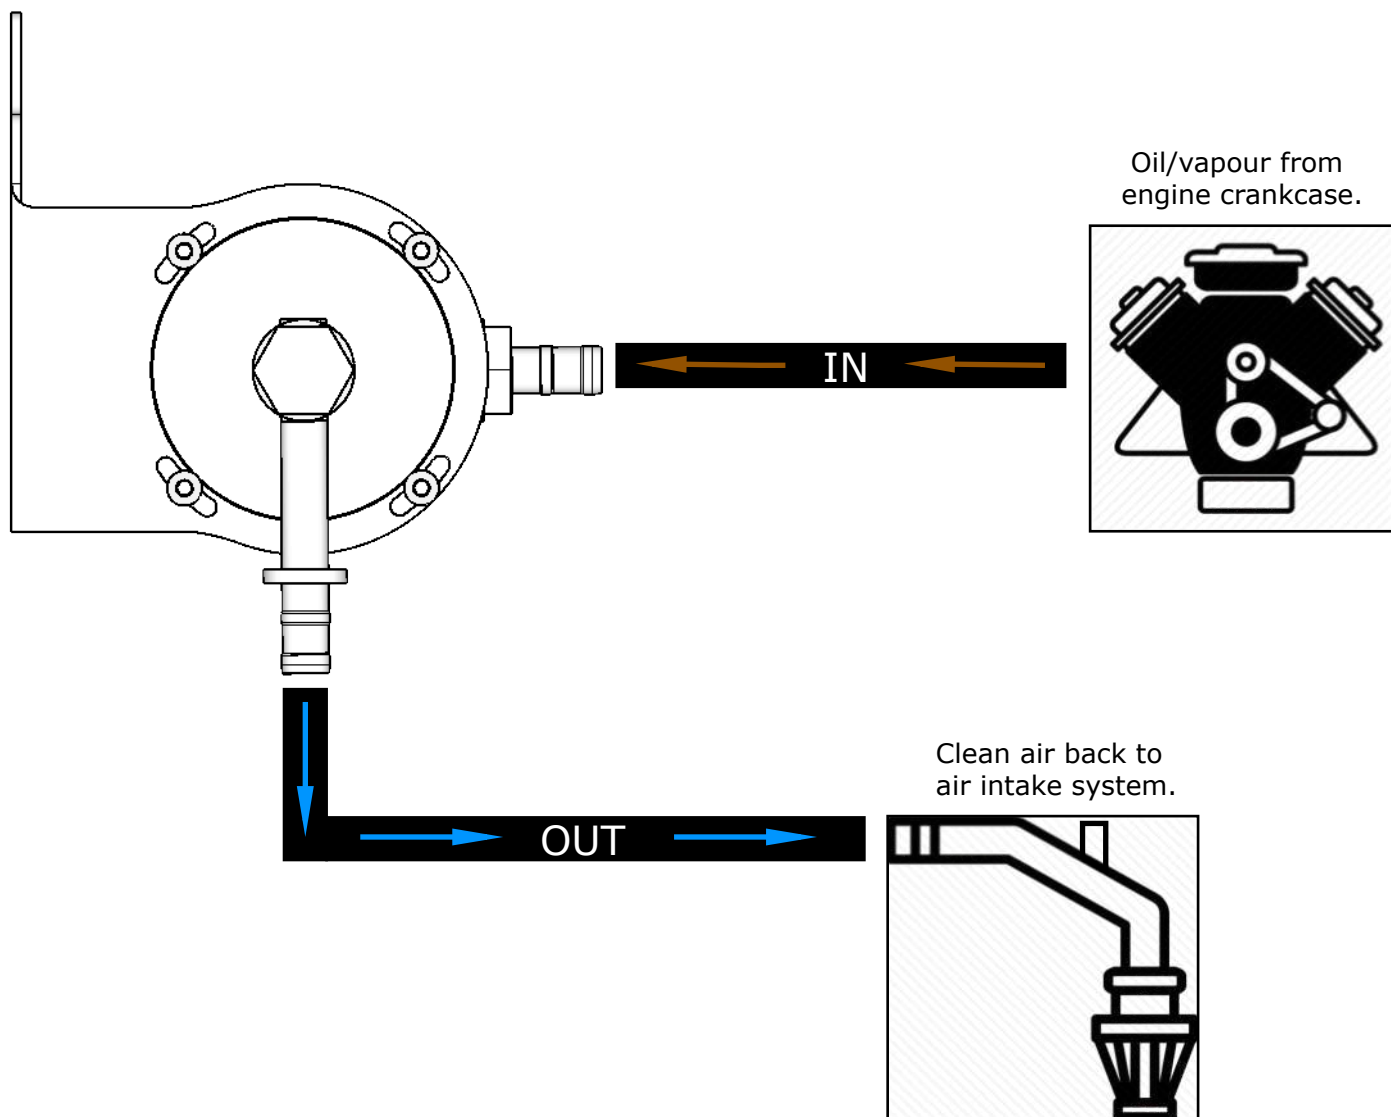

## Warranty Terms & Conditions:

SAAS Automotive Pty Ltd warrants this product against defects in factory workmanship and materials for a period of twelve (12) months from the date of original purchase. This warranty applies to the first retail purchaser, is non-transferable and covers only where the product has been subjected to normal use or service. Provision of this warranty shall not apply to any SAAS Automotive product that has been used for a purpose for which it is not designed, or which has been altered in any way that would be detrimental to the performance or life of the product, or misapplication, misuse, negligence or accident. Warranty claims to the manufacturer must be transportation prepaid and accompanied with dated proof of purchase. On any part or product found to be defective after examination by SAAS Automotive Pty Ltd, SAAS Automotive Pty Ltd will only repair or replace the merchandise through the original selling dealer or on a direct basis. SAAS Automotive Pty Ltd assumes no responsibility for diagnosis, removal and/or installation labour, loss of vehicle use, loss of time, inconvenience or any other consequential expenses. The warranties herein are in lieu of any other expressed or implied warranties, including any implied warranty of suitability, and any other obligation on the part of SAAS Automotive Pty Ltd, or the selling dealer.

**For further assistance email: [tech@saasautomotive.com.au](mailto:tech@saasautomotive.com.au)**



SAAS Automotive PTY LTD  
25 Metrolink Circuit West, Campbellfield,  
Victoria 3061 Australia

ABN: 48166279670  
ACN: 166279670

Phone: +61 3 9930 0100  
Fax: +61 3 8339 2270  
Email: [tech@saasautomotive.com.au](mailto:tech@saasautomotive.com.au)  
Web: [www.shopsaas.com](http://www.shopsaas.com)