



OIL CATCH TANK INSTALLATION KIT

Part No: ST1101

Fitting Instructions

V20191001

WARNING: If you do not have basic mechanical skills then **DO NOT** attempt to fit this kit. Incorrect fitting could result in serious damage to your engine and will not be covered under warranty!

CAUTION: Some metal parts in this kit may have sharp edges, please take care when handling.

Compatible Oil Catch Tanks:

Brand:	Part No:	Description:
SAAS	ST1014	Oil Catch Tank 4x4 Baffled (Black)
SAAS	ST1015	Oil Catch Tank 4x4 Baffled (Polished)

Vehicle Details:

Make:	Model/Series:	Year:	Engine/Code:
Toyota	Hilux/KUN	2005 - 2015	3.0L/1KD-FTV

Parts List:

Part:	Qty:	Notes:
Tank bracket	1	Fits to inner guard right side next to brake booster
16mm hose (engine side)	600mm	Can be cut shorter if required
16mm hose (intake side)	900mm	Can be cut shorter if required
16mm hose clamps	5	
16mm aluminium hose joiner	1	Fits to air intake side
Nuts/Bolts	1 x M6 bolt/washer	
Nuts/Bolts	1 x M8 bolt/washer	
Cable ties	5	Use to retain drain valve and hose
Fitting instructions	4 pages	

For further assistance email: tech@saasautomotive.com.au

www.shopsaas.com

Fitting Steps:

Step 1: Engine must be **OFF** and cool to touch.

Step 2: Remove the 5 fasteners (Fig 1) that hold the engine cover on and remove cover.

Step 3: Remove the 12mm bolt that holds the factory metal breather pipe (Fig 2) with the top and bottom rubber adaptors that run from the engine to air intake.

Fig 1



Fig 2



Step 4: Fit the supplied aluminium hose joiner to the 900mm hose supplied shown in (Fig 3). Fit the factory air intake adaptor to the other end as shown in (Fig 3).

Step 5: Refit the air intake adaptor shown in (Fig 4) back onto the air intake.

Step 6: Fit the 600mm hose supplied to the engine as shown in (Fig 5).


Fig 3



Fig 4



Fig 5

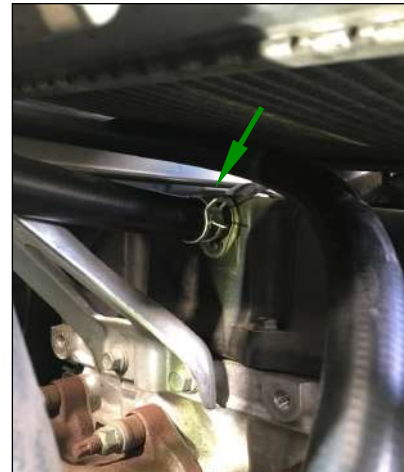

Step 7: Fit tank bracket to vehicle as shown in (Fig 6) with supplied fasteners.

Step 8: Fit tank to bracket as shown in (Fig 7) with drain valve attached.(Optional)

Fig 6

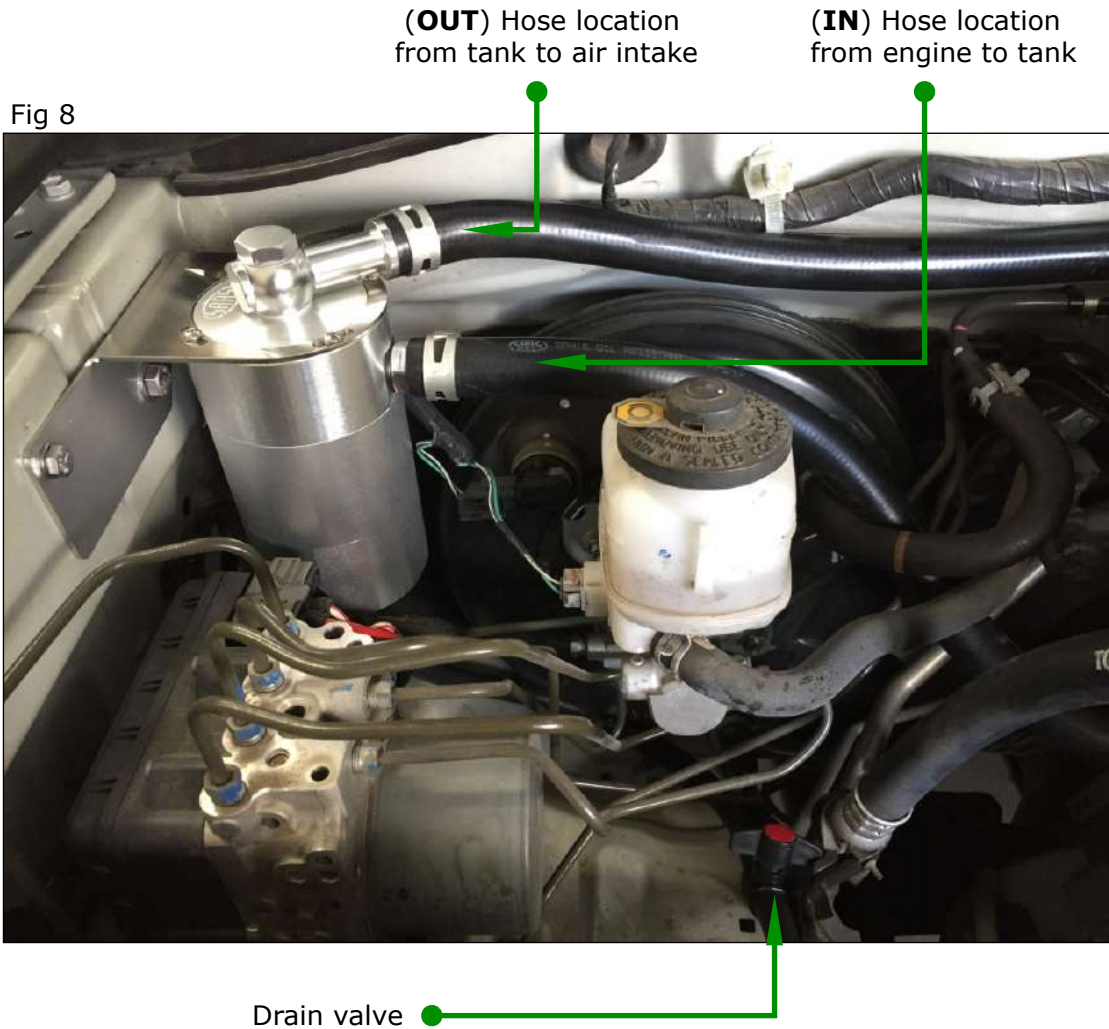


Fig 7



Step 9: Connect **(IN)** hose from engine to tank as shown in (Fig 8).

Step 10: Connect **(OUT)** hose from tank to air intake as shown in (Fig 8).



Step 11: Cable tie drain valve in a easy to get to location.(Optional)

Step 12: Refit engine cover and check all work before starting engine.


NOTE: SAAS recommends checking your catch tank after traveling 1000km to see how much oil has accumulated in the tank. It is important that the build-up of oil does not rise above the internal baffle through to the bronze filter.

Tank Maintenance:

SAAS recommends cleaning out your tank and **filter** every service interval for optimal performance. More frequent cleaning may be required for performance engines or vehicles in harsh conditions.

Cleaning Steps: remove tank from vehicle, remove tank base, remove filter (optional) and clean with a good quality automotive cleaner/degreaser.

Typical Layout:

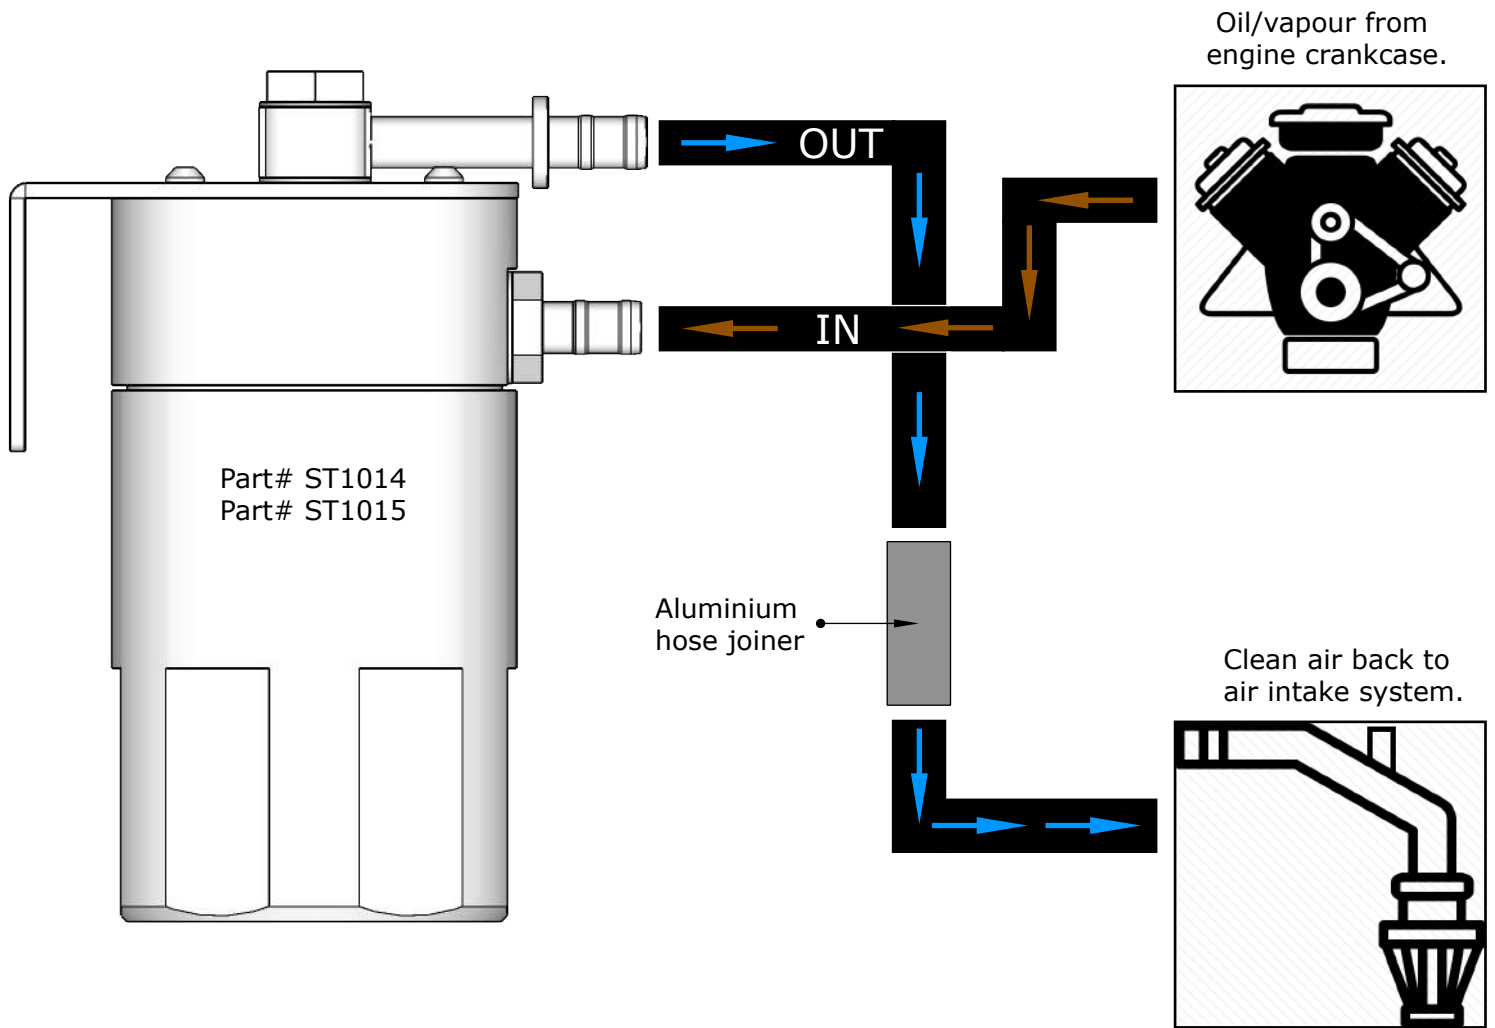

Warranty Terms & Conditions:

SAAS Automotive Pty Ltd warrants this product against defects in factory workmanship and materials for a period of twelve (12) months from the date of original purchase. This warranty applies to the first retail purchaser, is non-transferable and covers only where the product has been subjected to normal use or service. Provision of this warranty shall not apply to any SAAS Automotive product that has been used for a purpose for which it is not designed, or which has been altered in any way that would be detrimental to the performance or life of the product, or misapplication, misuse, negligence or accident. Warranty claims to the manufacturer must be transportation prepaid and accompanied with dated proof of purchase. On any part or product found to be defective after examination by SAAS Automotive Pty Ltd, SAAS Automotive Pty Ltd will only repair or replace the merchandise through the original selling dealer or on a direct basis. SAAS Automotive Pty Ltd assumes no responsibility for diagnosis, removal and/or installation labour, loss of vehicle use, loss of time, inconvenience or any other consequential expenses. The warranties herein are in lieu of any other expressed or implied warranties, including any implied warranty of suitability, and any other obligation on the part of SAAS Automotive Pty Ltd, or the selling dealer.

For further assistance email: tech@saasautomotive.com.au



SINCE 1954

SAAS Automotive PTY LTD
25 Metrolink Circuit West, Campbellfield,
Victoria 3061 Australia

ABN: 48166279670
ACN: 166279670

Phone: +61 3 9930 0100
Fax: +61 3 8339 2270

Email: tech@saasautomotive.com.au
Web: www.shopsaas.com